

Fuzzy Logic-Based Control for Shunt Active Power Filter using Instantaneous PQ Theory

Kiran Vasant Chavan¹ and Pramod Kumar Rathore²

M. Tech Scholar, RKDF College of Engineering, Bhopal, MP¹

Assistant Professor, RKDF College of Engineering, Bhopal, MP²

Abstract: The extensive use of power electronics devices in power systems, including rectifiers and inverters, presents considerable issues regarding power quality. One problem is the creation of current and voltage harmonics, which result in load waveform distortion, voltage fluctuation, voltage drop, and equipment overheating. Harmonic current sources are prevalent in commercial, institutional, and medical establishments, encompassing computer power supplies, fluorescent lights with electronic ballasts, elevator motors, and electrical devices using switch-mode power supplies. Active power filters (APF) represent the most effective method for harmonic reduction and may be used across many applications. This study employs a digital active power filter to eliminate harmonics from the source current in a grid system characterized by non-linear demand. Nonlinear loads are essential components of every power system. The advent of power electronics has resulted in switching components constituting a substantial portion of electrical demand. These features create discontinuities in lines, exacerbating line losses and diminishing power quality and sine wave integrity. Passive filters effectively eliminate harmonics at specified frequencies within the design. Active filters, conversely, operate in accordance with the prevailing harmonics. This work develops a shunt active power filter that mitigates current harmonics generated by non-linear loads. The active filter includes a voltage source converter (VSC) that functions in conjunction with a DC coupling capacitor. The VCS delivers power at the point of common coupling (PCC). The reference current is obtained by the instantaneous power theory. The instantaneous power theory, or PQ theory, has been enhanced with the FIS control system to optimize DC voltage generation over the DC link capacitor. The fuzzy system substituting the PI controller has a 49-rule base structure organized in a 7x7 configuration for the generation of error signals. A comparative study of DC voltage and total harmonic distortions (THDs) is conducted using MATLAB software and the FFT analysis tool.

Keywords: Active Power Filter, Instantaneous Power Theory, Harmonics, Non-Linear Load, MATLAB Simulink and FFT analysis tool, PI Controller, Fuzzy logic Controller

I. INTRODUCTION

Early technology was designed to withstand disturbances such as lightning, short circuits, and unexpected overloads without incurring extra expenditures. If existing power electronics (PE) equipment was built with the same resilience, costs would skyrocket. Nonlinear loads like transformers and saturation coils have fouled power networks, but the rate of disruption has never been as high as it is now. [1] Because of its nonlinear features and quick switching, PE causes the vast majority of pollution concerns. The bulk of environmental concerns may be attributed to PE's nonlinear features and fast switching. PE processes around 10% to 20% of today's energy; this figure is predicted to climb to 50% to 60% by 2010, due to the fast expansion in PE capabilities. On the one hand, there is a race between escalating PE pollution and sensitivity, while on the other, there is a race for novel PE-based remedial devices that may alleviate PE worries. Increased non-linearity produces a number of adverse features, including poor system efficiency and power factor. It also annoys other customers and interferes with the communication network in the neighborhood. Such nonlinearity has the potential to have a big influence in the coming years. As a consequence, conquering these undesirable traits is crucial.



Shunt passive filters, which are composed of tuned LC filters and/or high passive filters, are often used to reduce harmonics, while power capacitors are used to improve power factor. However, they have fixed compensation, are quite large in size, and may produce resonance issues. [2]

Active power filters are increasingly being considered as a viable alternative to standard passive filters for compensating for harmonics and reactive power needs of non-linear loads. The purpose of an active filter is to address these concerns by incorporating it with substantially lower ratings than the requisite passive filters. However, the traditional PI controller was employed to create a reference current template. The PI controller needs exact linear mathematical models, which are difficult to construct and do not work adequately in the presence of parameter fluctuations, nonlinearity, load disturbance, and so on. [3]

Fuzzy logic controllers (FLCs) have lately gained popularity in a variety of applications. FLCs offer various benefits over traditional controllers, including the fact that they don't need a flawless mathematical formula, can function with imperfect inputs, can handle non-linearity, and are significantly more resilient than ordinary nonlinear controllers. The passage of harmonic and reactive currents harms the power system by reducing the power factor and degrading voltage quality. These negative consequences are becoming more significant for the following reasons: [4]

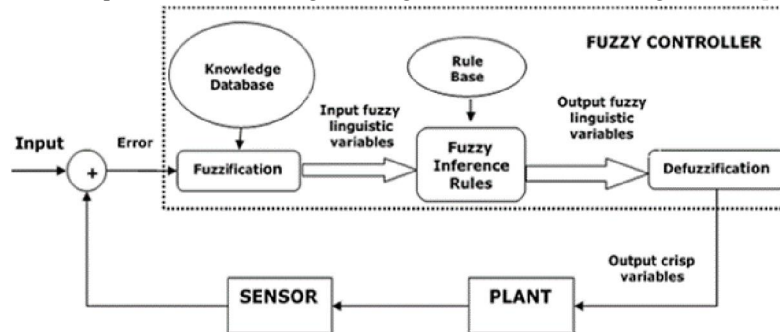


Figure 1.1 Fuzzy Logic Control System

While the power demand is growing, public concerns over environmental impacts of transmission lines and right of way costs are making it more difficult for utility companies to build new transmission lines. The need to build new lines is reduced if the current carrying capacity of the existing transmission facilities is fully utilized by improving the power factor.

Deregulation of the power industry is putting additional pressure on the utility companies to remain competitive by improving the voltage quality and by reducing the costly system losses.

Addition of harmonic generating loads such as power electronic equipment by consumers is increasing the level of harmonic current flow in power systems.

This paper implements a PI and fuzzy logic-controlled shunt active power filter for harmonics as well as reactive power correction of a nonlinear load. The control scheme is based on sensing line currents only; an approach different from conventional ones, which are based on sensing harmonics and reactive volt-ampere requirements of the nonlinear load. [5]

II. POWER QUALITY

“Any incident manifested in voltage, current, or frequency variations that leads in damage, upset, breakdown, or mis-operation of end-use equipment,” according to the PQ definition. In practically every part of commercial, home, as well as industrial use, all PQ difficulties are strongly tied to PE. Residential appliances such as televisions and computers, business and office equipment such as copiers and printers, including industrial equipment such as programmable logic controllers, variable speed drives, rectifiers, inverters, CNC machines, and so on all use power electronic devices.

Based on the type of concern, one or more of the following symptoms can be used to diagnose a Power Quality (PQ) problem. [6]

- Lamp flicker



- Frequent blackouts
- Sensitive equipment frequent dropouts
- Voltage to ground in unexpected locations
- Communications interference
- Overheated elements and equipment

Harmonics, inter-harmonics, dips, as well as neutral currents are all caused by PEs. Rectifiers, ASDs, soft starters, electrical ballasts for discharge lamps, switched-mode power supplies, and HVAC employing ASDs all generate harmonics. Transformers, motors, wires, interrupters, as well as capacitors are all impacted by harmonic (resonance). Converters are the primary source of notches, which have a significant impact on electrical control systems. Equipment that uses switched-mode power sources, including PCs, printers, photocopiers, as well as any triplet generators, generate neutral currents. Neutral currents have a significant impact on the temperature of the neutral conductor as well as the transformer's capabilities. Static frequency converters, cyclo-converters, induction motors, and electric current devices all generate inter-harmonics. [7]

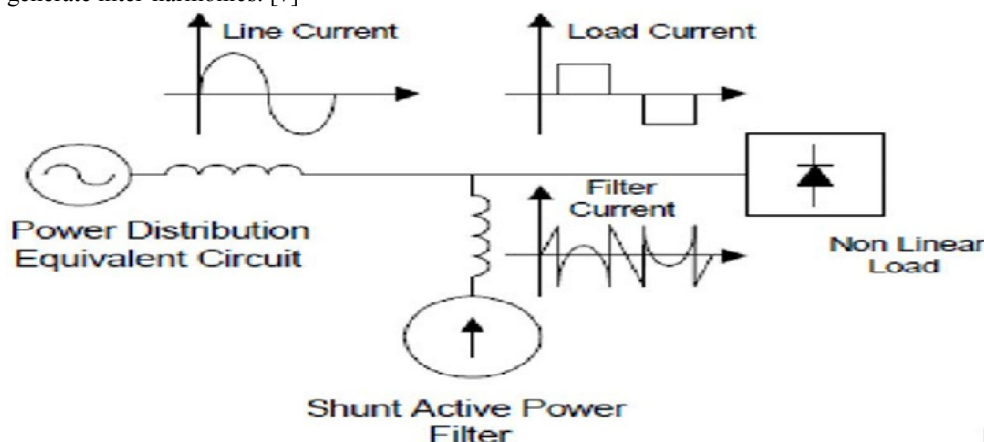


Figure 2.1 Power Quality Improvement

There are two ways to handle power quality concerns. The first way, known as load conditioning, ensures that the equipment is less susceptible to power disruptions, allowing it to function even when the voltage is severely distorted. Installing line-conditioning technology to reduce or eliminate power system disruptions is another possibility. [8] Passive filters have been the most widely used means of restricting the passage of harmonic currents via distribution networks. They are often manufactured to order for a particular application. Furthermore, their performance is limited to a few harmonics, and they may create power system resonance. Active power filters have shown to be an important and flexible alternative for adjusting for voltage and current changes in power distribution systems, among other innovative technological solutions for improving power quality. The notion of active filters is not new, but it has only recently become a reality because to advances in power electronics and microcomputer control strategies, as well as decreasing electronic component prices. Active power filters are rapidly increasing market share as their prices fall below those of passive power filters. The active filter generates current or voltage components using power electronics, eliminating the harmonic components of nonlinear loads or supply lines. A variety of active power filter topologies have been designed, and some are now commercially available. [9]

III. SHUNT ACTIVE POWER FILTER

Shunt active power filters (SAPF) are linked in parallel to the power system network whenever a single source of harmonics is accessible, as the name implies. Its primary function is to cancel out the harmonic or non-sinusoidal current created in the power system as a consequence of the presence of a nonlinear load by creating a current equal to the harmonic current but in the opposite phase, i.e. with a 180° phase shift. SAPF commonly uses a current-controlled voltage source inverter (IGBT inverter) to create compensating current (i_c) and balance the harmonic component of the



load line current while maintaining a sinusoidal source current waveform. The figure below displays the basic configuration. [10]

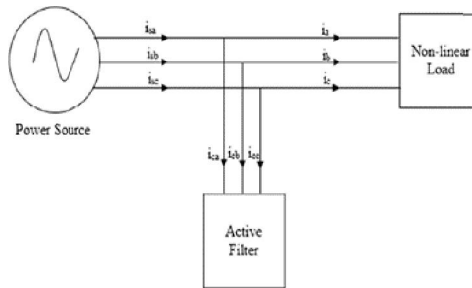


Figure 3.1 Shunt active Power Filter

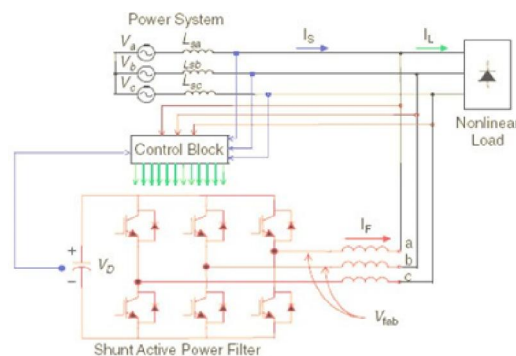


Figure 3.2 Shunt Active Power Filter Topology

IV. HARMONICS IN POWER SYSTEM

Harmonic-related problems are not new in the electric power system. From the early 1920's, harmonics were observed in power equipment because of telephone line interference. The proliferation of power converter equipment connected to the distribution power system, which limits harmonic current injection, maintains good power quality. The various standards and guidelines have been established that specify limits on the magnitudes of harmonic currents and voltages. [10]

The Committee Européenne de Normalisation Electrotechnique (CENELEC), International Electrotechnical Commission (IEC), and Institute of Electrical and Electronics Engineers (IEEE) specify the limits on the voltages at various harmonic frequencies of the utility frequency.

In 1983, the IEEE Working Group made a reference about harmonic sources and effects on the electric power system. There is significant activity in the IEEE Power Engineering Society and IEEE Industry Applications Society to detect harmonic effects. These societies and institutes define standards for harmonics. Researchers surveyed and reported the harmonic levels (three classes of distribution circuits: residential, commercial, and industrial) in the American Electric Power Distribution System. [11]



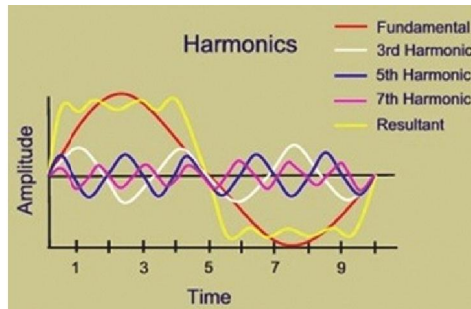


Figure 4.1 Harmonics in Power System

Mitigation of harmonics

The harmonic related problem is mitigated by using active power quality conditioner. The active power quality conditioner can also be coupled in series, parallel, or hybrid topologies, and also combos of both (unified power quality conditioners). In between nonlinear load and also the distribution system, the series APLC acts as a voltage regulator as well as harmonic isolator. The series active filter infuses a voltage component in series with the supply voltage, making it a controlled voltage source that compensates for voltage sags as well as surges on the load side. [12] The injected harmonic voltages are added or subtracted to/from the source voltage to maintain pure sinusoidal voltage across the load. Hybrid APLC is a combination of passive and active power line conditioner. By injecting a controlled harmonic voltage source into the hybrid series APLC, it can operate as a harmonic isolator between the source as well as the non-linear load. The series and shunt APLCs are combined in a unified power quality conditioner. At the utility-consumer point of common connection, the series active power filter may regulate voltage and compensate for harmonics.

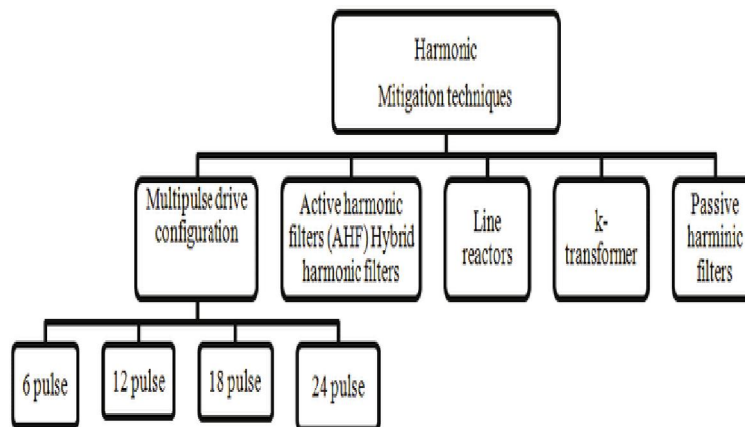


Figure 4.2 Harmonic Mitigation Technique

The shunt active power filter captures current harmonics, compensates for reactive power as well as negative-sequence current, and controls the dc link voltage between the two active power line conditioners. Because of the growing utilisation non-linear loads, power system current harmonics are a serious challenge in the distribution network. According to the literature, the shunt active power line conditioner is a viable option for resolving present harmonic and reactive-power issues. Aside from power factor correction, the shunt APLC compensates for harmonic currents generated by non-linear loads.

V. FIS CONTROL SYSTEM

Fuzzy logic is a multidimensional logic system in which each parameter in the fuzzy logic set has a membership degree. A fuzzy set is made up of three main elements:



success of some applications requiring in the late 1980s, this dramatically changed. Power engineers rely heavily on heuristics, perception, specialized knowledge, experience, and language descriptions. Almost every practical engineering challenge necessitates some "imprecision" in approach and evaluation.

Fuzzy control is a way for formally representing, manipulating, and implementing human heuristic knowledge about how to manage a system. The block diagram of a fuzzy logic controller with a closed-loop control system is shown in Figure 3. The process outputs are designated by $y(t)$, the process inputs are represented by $u(t)$, as well as the fuzzy controller's reference input is represented by $r(t)$.

The fuzzy controller is made up of four primary parts: The knowledge in the form of a collection of rules outlining the optimal way to manage a system is stored in the rule-base. To measure knowledge, membership functions are being used. The inference system determines which control rules are applicable at this time and then determines which plant input must be activated. [15] The inputs are modified by the fuzzification interface so that they may be understood and matched to the rules in the rule-base. The defuzzification interface converts the plant's inputs into the conclusions derived by the inference engine. A circuit illustration of a fuzzy logic controller is shown in fig.

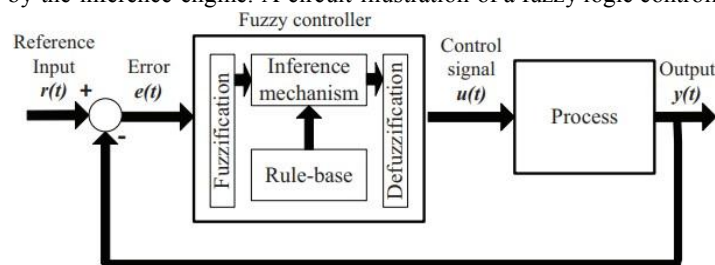


Figure 5.2 Scheme of a fuzzy logic controller

VI. RESULTS AND DISCUSSION

A simulation study is done using MATLAB/SIMULINK to study the performance of shunt active filter based on d-q transformation and SRF theory.

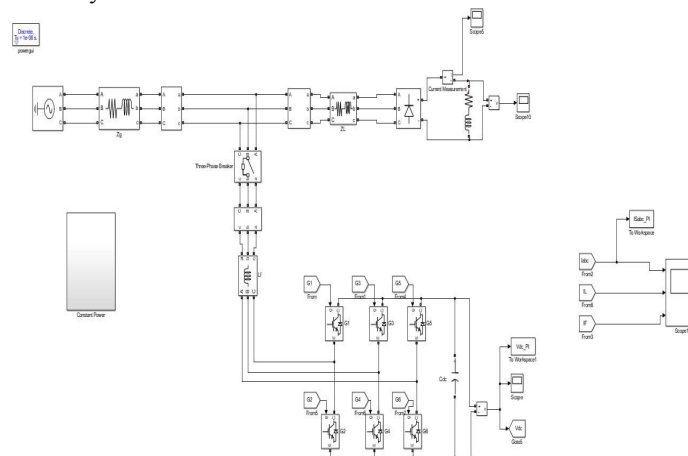


Figure 6.1 Grid system with non-linear load connected to digital active power filter at PCC

As seen in the above fig. 6.1 modelling the grid is connected to non-linear load as diode bridge rectifier connected RL load. This load generates harmonics in the system and the source currents get disrupted. A digital active power filter with six switches and DC link capacitor is connected at PCC to mitigate harmonics in the system which is controlled by PQ theory. The modelling of the PQ theory can be seen below in fig 6.2



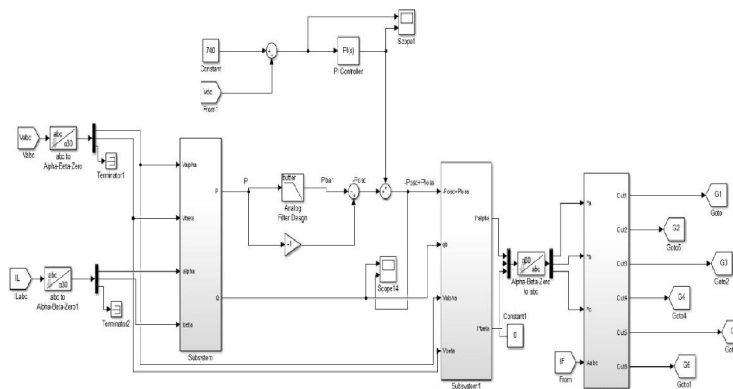


Figure 6.2 PQ theory control structure with PI controller of digital active power filter

The P_{loss} signal is generated by comparison of reference DC value with measured DC link voltage fed to PI controller. The below fig. 6.3 is the hysteresis current loop controller for generation of pulses to digital active power filter IGBT switches.

There are many techniques of generation of gating pulses but the most widely used technique is hysteresis controller because of this simplicity and quick response. This technique also does not require the knowledge of load constraints. Variation of switching frequency with variation in fundamental period of load parameters is one of the drawbacks of this.

In hysteresis controller the reference current which was obtained by SRF technique or instantaneous power technique are compared with the filter current. For generation of gate pulses of switching elements according to the need of injecting power into the line, this controller is used. It compares the reference current (generated by instantaneous power theory inside the controller) and the filter current to generate the gate pulses.

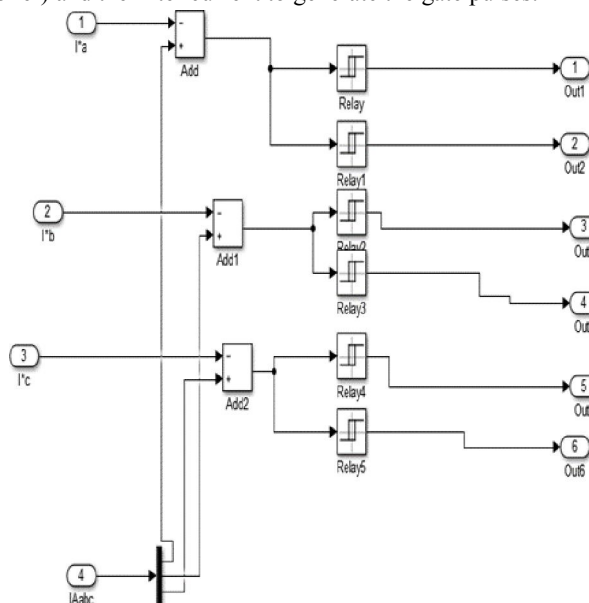


Figure 6.3 Hysteresis current loop controller for generation of pulses



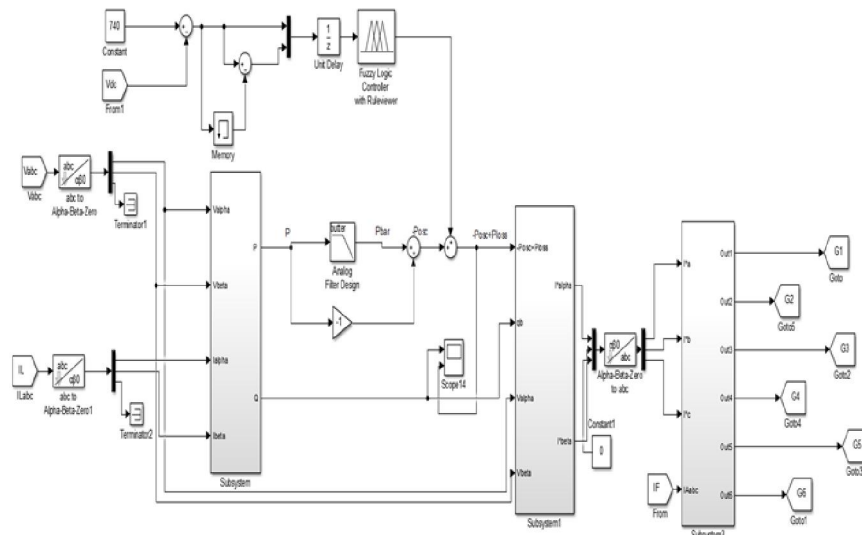


Figure 6.4 PQ theory control structure with FIS controller of digital active power filter

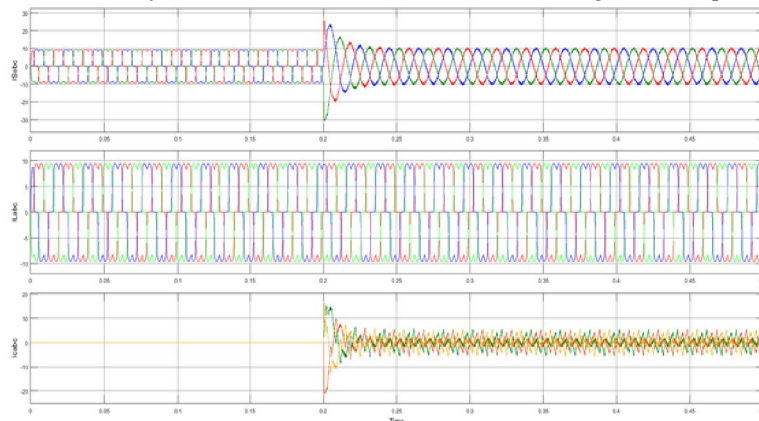


Figure 6.5 Source currents, Load currents and compensating current before and after digital active power filter

The above fig 6.5. Shows the source currents, load currents and compensation currents from the digital active power filter comparison before and after the device connected at 0.2sec

The PQ theory is further updated with FIS controller at the DC link comparison and the simulations are carried out with 0.5sec simulation time. From 0-0.2sec there is no digital active power filter connected, and at 0.2sec the device is connected and from 0.2-0.5sec the system is with digital active power filter. The results of system currents and DC link voltages with THD analysis of the source current are given below in fig 6.5.



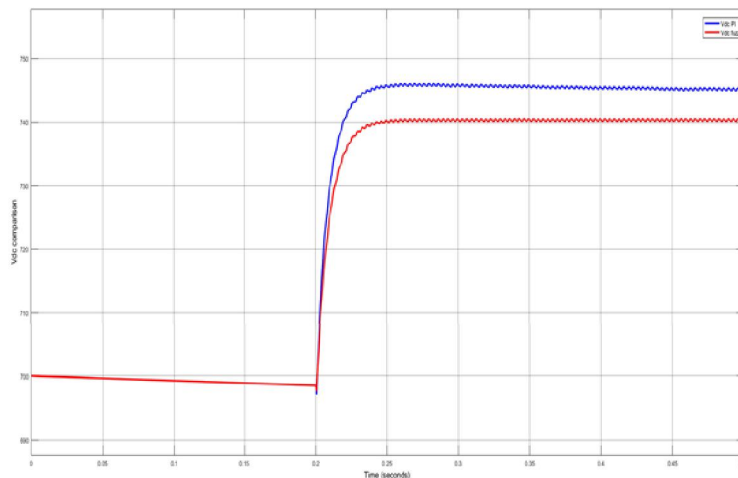


Figure 6.6 DC link voltage comparison at DC capacitor with PI and FIS controllers
The above fig 6.6 is the DC link voltage comparison of PI and FIS controller of the PQ theory.

Fast Fourier Transformation (FFT):

FFT is algorithm for calculating Discrete Fourier analysis of complex calculation signals. Then it is used for calculating total harmonic distortion (THD) in signal. THD is measure of harmonic distortion in signal. It is ratio of sum of power of all harmonic components to the power of fundamental frequency.

The THDs of the source current without and with digital active power filter by PI and FIS are shown below in fig 6.7, 6.8, and 6.9.

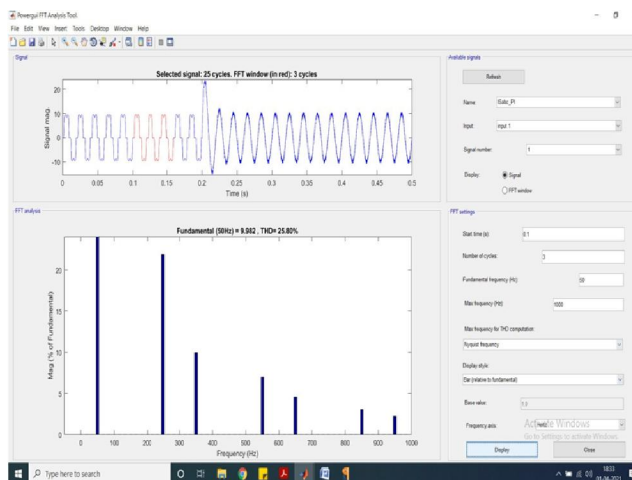


Figure 6.7 THD of source current without digital active power filter



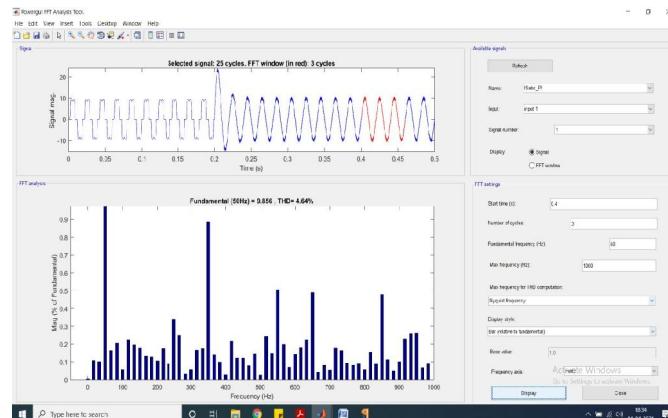


Figure 6.8 THD of source current with PI controller digital active power filter

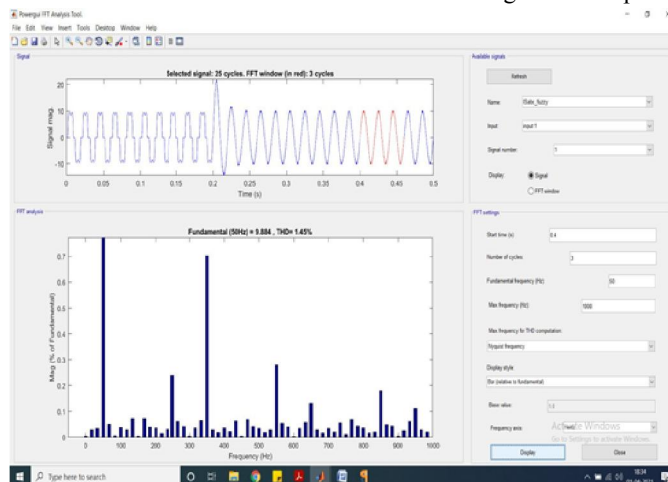


Figure 6.9 THD of source current with FIS controller digital active power filter

VII. CONCLUSION

The graphs above demonstrate that harmonics are reduced when a grid system with a non-linear load is connected to a digital active power filter. This variable PWM signal is generated by integrating Park's transformation with a digital PI controller. The PWM signals serve as control signals for a voltage source inverter (VSI), which introduces harmonics of equivalent magnitude with a 180-degree phase shift to mitigate the impact of harmonics or distortion in the power line. Compared to the PI controller, the FIS controller produces a more accurate DC link voltage of 740V. The total harmonic distortion (THD) of the source current is 25.8% without a digital active power filter, and it reduces to 4.64% when connected to a device governed by a PI controller using PQ theory. The total harmonic distortion (THD) is reduced to 1.45% upon the enhancement of the power quality (PQ) theory using the fuzzy inference system (FIS) module. The performance of the digital active power filter enhances when the controller is augmented with the FIS module.

REFERENCES

[1] Mohammed Mohiuddin;Noor Maricar;Kushsairy Abdul Kadir;Nurul Fazlin Roslan;Muhammad Islam;Sheroz Khan;Ezzidin Hassan Aboadla "Mitigation of Harmonics Using Novel Sector-Based Switching Pattern Space Vector Pulse Width Modulation" 2023 IEEE Access (Volume: 11).



- [2] Sayed Aldebawy; Abdelmonem Draz; Attia El-Fergany "Harmonics Mitigation Using Passive Filters in Distribution Networks Penetrated with Photovoltaic power" 2022 23rd International Middle East Power Systems Conference (MEPCON).
- [3] Zebin Yang; Hao Yi; Xiaoqing Yin; Fang Zhuo; Lizheng Sun "System-Level Control Strategy of Multiple SAPFs for Comprehensive Harmonic Mitigation in Distribution Systems" 2021 IEEE 1st International Power Electronics and Application Symposium (PEAS).
- [4] Ö. A. KARAMAN, A. GÜNDÖĞDU, and M. CEBECİ, "Performing reactive power compensation of three-phase induction motor by using parallel active power filter," *Int. Adv. Res. Eng. J.*, vol. 4, no. 3, pp. 239–248, 2020, doi: 10.35860/iarej.731187.
- [5] B. Wang and Z. Cao, "A review of impedance matching techniques in power line communications," *Electron.*, vol. 8, no. 9, pp. 1–25, 2019, doi: 10.3390/electronics8091022.
- [6] K. Sur, B. Dhabale, and N. Khobragade, "Performance Analysis of a Hybrid Filter Composed of Passive and Active Filter with Active Damper Controller," vol. 4, no. 3, pp. 32–38, 2018.
- [7] Y. Naderi, S. H. Hosseini, S. Ghassem Zadeh, B. Mohammadi-Ivatloo, J. C. Vasquez, and J. M. Guerrero, "An overview of power quality enhancement techniques applied to distributed generation in electrical distribution networks," *Renew. Sustain. Energy Rev.*, vol. 93, pp. 201–214, 2018, doi: 10.1016/j.rser.2018.05.013.
- [8] R. Senapati, R. N. Senapati, and M. K. Maharana, "Study and analysis of performance of 3-phase shunt active filter in grid-tied PV-Fuel Cell system employing Sinusoidal Current Control Strategy," *Int. J. Renew. Energy Res.*, vol. 8, no. 1, pp. 67–81, 2018, doi: 10.20508/ijrer.v8i1.6571.g7282.
- [9] H. Singh, M. Kour, D. V. Thanki, and P. Kumar, "A review on Shunt active power filter control strategies," *Int. J. Eng. Technol.*, vol. 7, no. 4, pp. 121–125, 2018, doi: 10.14419/ijet.v7i4.5.20026.
- [10] W. U. K. Tareen and S. Mekhief, "Three-Phase Transformerless Shunt Active Power Filter with Reduced Switch Count for Harmonic Compensation in Grid-Connected Applications," *IEEE Trans. Power Electron.*, vol. 33, no. 6, pp. 4868–4881, 2018, doi: 10.1109/TPEL.2017.2728602.
- [11] B. R. Madhu, M. N. Dinesh, and B. M. Ravitheja, "Design of shunt hybrid active power filter to reduce harmonics on AC side due to non-linear loads," *Int. J. Power Electron. Drive Syst.*, vol. 9, no. 4, pp. 1926–1936, 2018, doi: 10.11591/ijpeds.v9n4.pp1926-1936.
- [12] S. Biricik, O. C. Ozerdem, S. Redif, and M. S. Dincer, "New hybrid active power filter for harmonic current suppression and reactive power compensation," *Int. J. Electron.*, vol. 103, no. 8, pp. 1397–1414, 2016, doi: 10.1080/00207217.2015.1116113.
- [13] I. Ali, V. Sharma, and P. Chhawchharia, "Control Techniques for Active Power Filter for Harmonic Elimination & Power Quality Improvement," *Int. J. Electr. Electron. Data Commun.*, vol. 4, no. 10, pp. 25–36, 2016.
- [14] V. Meenakshi, G. D. Anbarasi Jebaselvi, and S. Paramasivam, "Space vector modulation technique applied to doubly fed induction generator," *Indian J. Sci. Technol.*, vol. 8, no. 33, 2015, doi: 10.17485/ijst/2015/v8i33/60766.
- [15] A. Ponder, S. Member, I. L. Pham, and S. Member, "Space Vector Pulse Width Modulation in Wind Turbines ' Generator Control," *IEEE Res. Pap.*, pp. 1–6, 2014.

