

# Image Recognition System using Machine Learning with Desktop Application.

Aryan Anil Kinare, Anushree Prakash Nagrale, Mohit Avinash Bansod  
Namrata Rajendra Bharose, Kumar Dadarao Wankhade, Pranav Sadanand Dhone  
DRGITR, Amravati, Maharashtra


**Abstract:** *Image recognition is important side of image processing for machine learning without involving any human support at any step. In this paper we study how image classification is completed using imagery backend. Couple of thousands of images of every, cats and dogs are taken then distributed them into category of test dataset and training dataset for our learning model. The results are obtained using custom neural network with the architecture of Convolution Neural Networks and Keras API.*

**Keywords:** CNN, Keras, Machine-learning, Deep learning, Keras, Image-recognition

## I. INTRODUCTION


Image classification came into existence for decreasing the gap between the pc vision and human vision by training the pc with the info. Artificial Intelligence has for decades been a field of research in which both scientists and engineers have been making intense efforts to unravel the mystery of getting machines and computers to perceive and understand our world tolerably to act properly and serve humanity. One of the foremost important aspect of this research work is getting computers to know visual information (images and videos) generated everyday around us. This field of getting computers to perceive and understand visual information is understood as computer vision. During the rise of artificial intelligence research in the 1950s to the 1980s, computers were manually given instructions on how to recognize images, objects in images and what features to look out for. This method are traditional algorithms and were called Expert Systems, as they require that humans take the pain of identifying features for every unique scene of object that has to be recognize and representing these features in mathematical models that the pc can understand. That involves an entire lot of tedious work because there are hundreds and thousands of varied ways an object are often represented and there are thousands (or even millions) of different scenes and objects that uniquely exist, and thus finding the optimized and accurate mathematical models to represent all the possible features of every objects or scene, and for all possible objects or scene is more of work that will last forever. In the 1990s, the concept of Machine Learning was introduced and it ushered in an era during which rather than telling computers what to seem out for in recognizing scenes and objects in images and videos, we will instead design algorithms which will make computers to find out the way to recognize scenes and objects in images by itself, just like a child learns to know his/her environment by exploring. Machine learning opened the way for computers to find out to acknowledge almost any scene or object we would like them too. The basic artificial neural network is printed in Section-II. SectionIII describes about Convolutional Neural Network. The implementation and results are discussed in Section-IV. We conclude in section-V and eventually the references are given at the top.



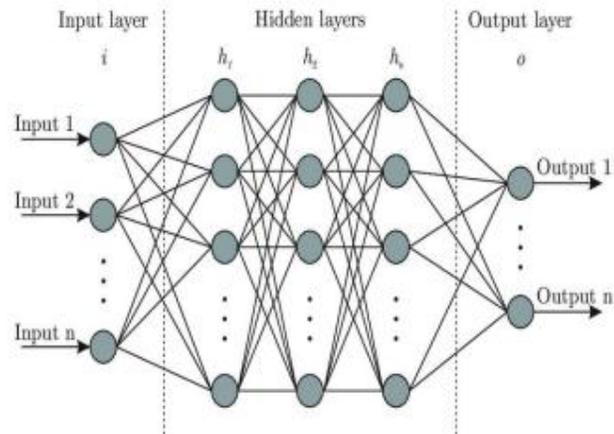

## II. ARTIFICIAL NEURAL NETWORK

A] A neural network is a combination of hardware bonded or separated by the software system which operates on the small part in the human brain called as neuron. A multi layered neural network are often proposed as an alternate of the above case. The training images samples should be quite ninefold the amount of parameters essential for tuning the classical classification under excellent resolution. The data structures and functionality of neural nets are designed to simulate associative memory. Neural nets learn by processing examples, each of which contains a known "input" and "result," forming probability-weighted associations between the two, which are stored within the data structure of the net itself.

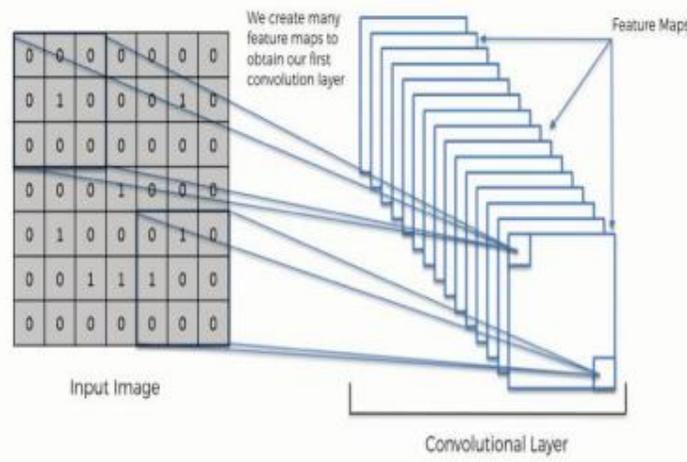

## B] CONVOLUTIONAL NEURAL NETWORK

In deep learning, a convolutional neural network (CNN, or ConvNet) is class of deep neural networks, most ordinarily applied to analyzing visual imagery. They are also referred to as shift invariant or space invariant artificial neural networks (SIANN), supported their shared-weights architecture and translation invariance characteristics. They have applications in image and video recognition, recommender systems, image classification, medical image analysis, tongue processing, and financial statistic . The network places a 3x3 cell matrix over the provided image and then converts the data into a feature map with 1s and 0s, this operation is repeated for the whole image and feature maps are created with each layer having better feature detector applied.



### **III. IMPLEMENTATION, RESULTS AND DISCUSSION**

We selected total of nearly 24,000 images of cats and dogs and also having rotations and scaling of many images as each scaled image is a new image for the model as input. For training the model we kept around 90% of dataset and rest for testing it extensively. 10 epochs (training cycles) were provided for images and with every epoch, the accuracy was expected to be increased which uses the power of TensorFlow backend dependent of discrete GPU. In the first layer we obtained the output volume size of 55x55x96. The model is trained on the GPU named GTX 1050ti which provides 4gb of memory. So, the first layer is sent to the GPU after converting it to 55x55x48.

### **IV. CONCLUSION**

The testing of random images came out to be successful. The image dataset was pulled from google repository directly. The convolutional neural network is used in-hand with Keras for classification purpose. From the experiments we observe that the images are classified correctly even if the same images were scaled in different sizes or trimmed or rotated to get entirely new image for the input showing the effectiveness of deep-learning algorithm.

### **REFERENCES**

- [1]. Thomas, Elsken; Jan Hendrik, Metzen; Frank, Hutter (2017-11-13). "Simple and Efficient Architecture Search for Convolutional Neural Networks"
- [2]. Elsken, Thomas; Metzen, Jan Hendrik; Hutter, Frank (2018-04-24). "Efficient Multi-objective Neural Architecture Search via Lamarckian Evolution".
- [3]. Springenberg, Jost Tobias; Dosovitskiy, Alexey; Brox, Thomas; Riedmiller, Martin (2014-12-21). "Striving for Simplicity: The All-Convolutional Net".
- [4]. Romanuke, Vadim (2017). "Appropriate number and allocation of ReLUs in convolutional neural networks". Research Bulletin of NTUU "Kyiv Polytechnic Institute". 1: 69–78.
- [5]. Bengio, Yoshua; Lamblin, Pascal; Popovici, Dan; Larochelle, Hugo (2007). "Greedy Layer-Wise Training of Deep Networks"(PDF). Advances in Neural Information Processing Systems: 153–160.
- [6]. "Using TPUs TensorFlow". TensorFlow. Retrieved 2018-11-14.
- [7]. "Keras Documentation". keras.io. Retrieved 2016-09- 18.
- [8]. TensorFlow (March 30, 2018). "Introducing TensorFlow.js: Machine Learning in JavaScript". Medium. Retrieved May 24,2019.
- [9]. KISHORE, P.V.V., PRASAD, M.V.D., PRASAD, C.R. and RAHUL, R., 2015. 4-Camera model for sign language recognition using elliptical fourier descriptors and ANN, International Conference on Signal Processing and Communication Engineering Systems - Proceedings of SPACES 2015, in Association with IEEE 2015, pp. 34-38.
- [10]. KARTHIK, G.V.S., FATHIMA, S.Y., RAHMAN, M.Z.U., AHAMED, S.R. and LAY-EKUAKILLE, A., 2013. Efficient signal conditioning techniques for

